

## Swedstyle Motion I


*Flush-fitting hand controller for easily accessible control of height-adjustable desk frames from the top of the desktop.*

Flush-fitting hand controller in an ergonomic design. Its positioning on the top of the desktop makes it particularly accessible, and the flush-fitting design of the model means the desktop surface remains smooth and fully usable.

- Compact recessed model
- Modern design
- Minimalist, stylish
- Up/Down function
- Great button feel



| Product            | Art. No | Colour |
|--------------------|---------|--------|
| Swedstyle Motion I | HAND30  | Black  |

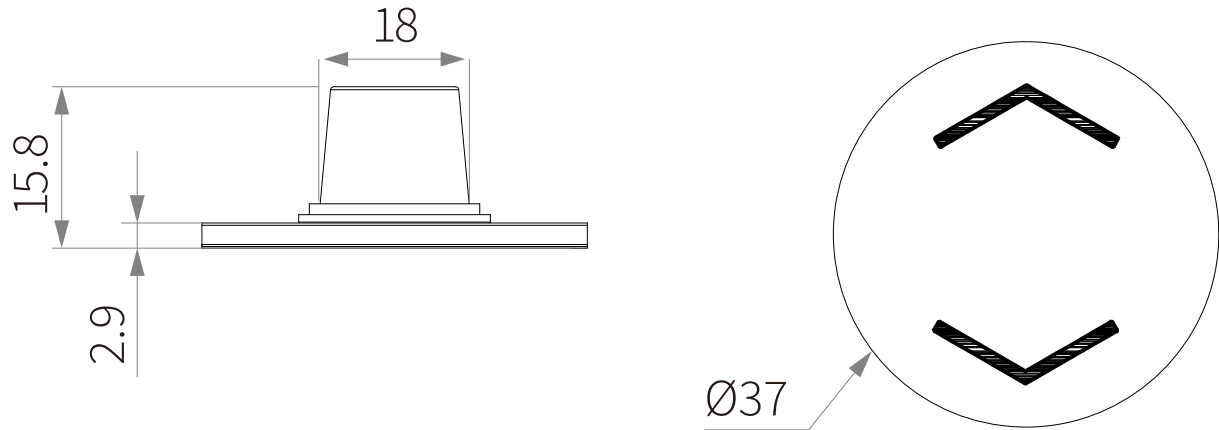

## Technical specifications

|   |   |
|---|---|
| Supply voltage                                  | 5 VDC $\pm$ 10%   |
| Current Consumption (average)                   | <1 mA   |
| Rated switching current                         | 50 mA   |
| Service life                                    | 10 000 cycles   |
| Cable length                                    | 1 500 mm  |
| Dimensions                                      | $\varnothing$ 37 mm   |
| Dimensions (milled cut-out)                     | $\varnothing$ 37,5 mm, height 3 mm  |
| Ambient conditions during operation             | +5 °C to +40 °C at max. 68% relative air humidity (non-condensing),<br>up to an altitude of 2,000 m.  |
| Ambient conditions during transport and storage | -25 °C to +40 °C at max. 68% relative air humidity (non-condensing).<br>+40 °C to 60 °C at max. 32% relative air humidity (non-condensing).<br>Temperatures of more than 40 °C for periods not exceeding 10h.<br>Product must be acclimatised to acceptable operating conditions before assembly. |
| Compatibility                                   | All Swedstyle electric height-adjustable frames   |
| Degree of protection (IEC 60529)                | IP 20   |
| Standards and regulations                       | EMC directive 2014/30/EU<br>RoHS directive 2011/65/EU   |