


Flexlock Invisible 2.0 LED


Mifare 13.56 MHz

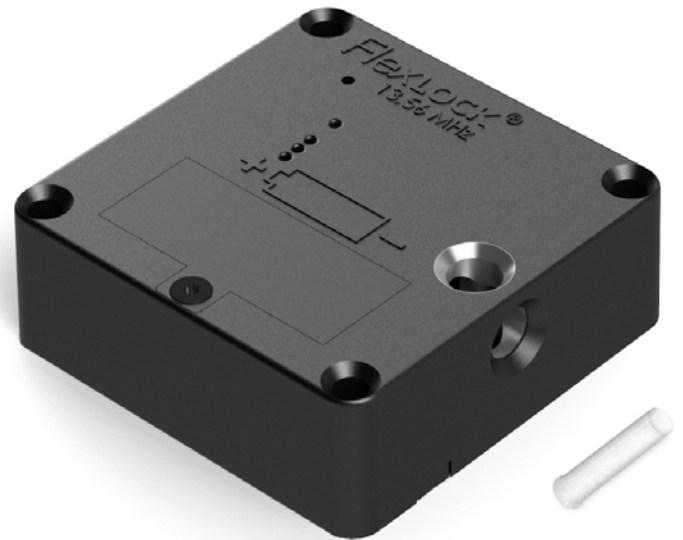

Same lock as Flexlock Invisible 2.0 but even smarter with built-in LED which indicates a flashing light if the storage is available. By drilling a hole through the front of the door/drawer and installing the accompanying light guide, the light becomes visible from the outside. Available only for Mifare 13.56 MHz.


Locks for smarter, more convenient storage. Flexlock Invisible is installed on the inside of the unit and is never visible on the outside, giving your furniture a clean, stylish look. Flexlock Invisible can be installed in both new and existing storage solutions. The lock itself is supplemented by lock plates designed to suit a range of furniture types. The lock is battery powered and no external power supply is required. The lock is suitable for both standard and self-closing hinges.

- Installed out of sight on the inside of the unit
- LED indicates whether the storage unit is free
- Easy to service and administer
- Easy to adapt to the needs of the workplace
- Easy to install, easy to use
- Battery powered
- Can be fitted to drawers, cabinets, sliding doors and pull-out storage unit
- Can be programmed with various functions e.g. time limit

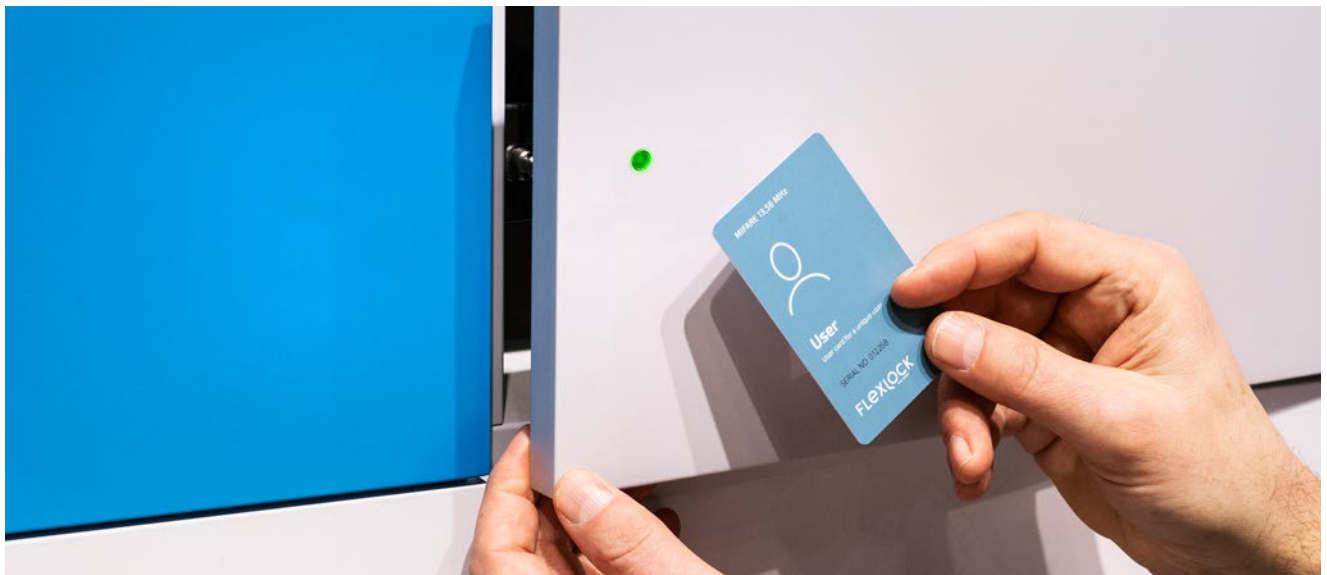

Technical Specifications

FLEXLOCK INVISIBLE

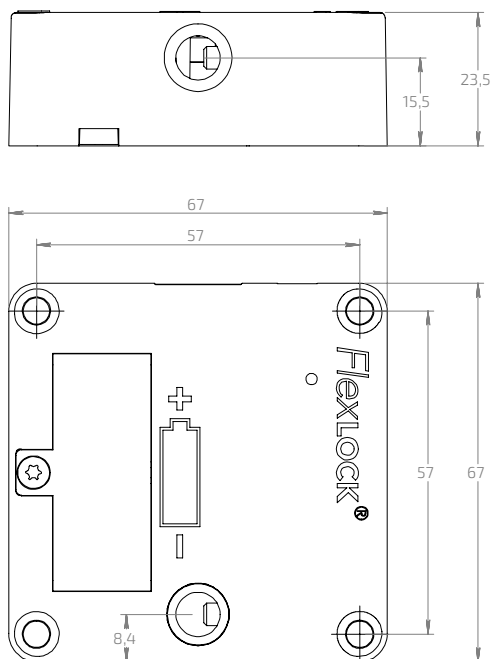


ASSEMBLY OF LED

The lock is mounted on the inside of the cabinet. A hole is drilled in the door for the light guide. mounting template is included with purchase.

Flexlock Invisible 2.0

Light guide
Can be installed in doors with a thickness of 15-20 mm. Special orders can be made for thinner doors.

Cabinet door

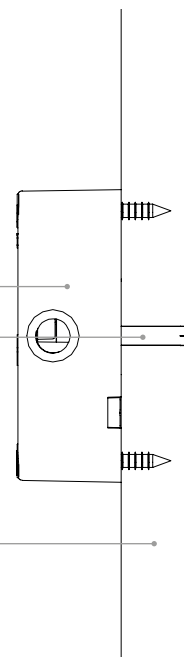

Size	67 x 67 x 23 mm
Weight	54 g (without battery)
Temperature	+17° till +30° C
Humidity	20% to 75% relative humidity, non-condensing
Battery	For battery life and software to work according to specification requires a Flexlock battery which is provided by Swedstyle or your Flexlock dealer
HF emission	Max 20dBμA vid 10 m
IP-code	IP 20
Number of users	Mifare: max 200 st
Battery lifespan	Up to 3 years or 30 000 openings
RFID	13,56 MHz: ISO/IEC 14443 A & B, ISO/IEC 180092, ISO/IEC 15693
Compatible with	13,56 MHz: Mifare Classic 1k, Mifare Classic 4k, Mifare DESFire EV1, EV2 & EV3, ISO 14443A, Legic Advant 15693, Mifare Plus, Mini, Ultra Light HID iClass 2k, iClass 4k, iClass SE 2k, 32k
Reading distance	< 25 mm with Swedstyle-cards, other cards or tags may have shorter and varied reading distance
Lock standard	SS-EN 16014:2011, Designed for DIN 4547 Class B
Electrical safety	IEC/EN/UL 62368, CSA 22.2
EMC and EMR radio test	ETSI 300 330-1/-2 och 301 489-1/-3, FCC Part 15B, ICES-003
LED	Can be installed in doors with a thickness of 15-20 mm. For thinner doors 5-12 mm, special orders can be made

Flexlock is CE marked and meets the requirements, see separate CE declaration.

More info at www.flexlock.se

Flexlock is a product developed and marketed by Swedstyle.

 SWEDSTYLE

Swedstyle AB
Box 171
SE-567 24 Vaggeryd, Sweden
info@swedstyle.se
+46 393-363 60
www.swedstyle.com