


Flexlock Visible 2.0 Card+

Mifare 13.56 MHz



A lock for easier storage. Flexlock Visible is fitted externally and can be installed on units made from both wood and metal. It is compatible with the majority of storage units and lockers that are currently equipped with cylinder locks with 19 mm and 22 mm diameters. The lock is battery powered and no external power supply is required. The LED on the lock flashes green if the unit is free.



Lock tumblers are available in different lengths and designs to suit a range of units. The lock can be fitted to doors with a maximum thickness of 24 mm – either vertically or horizontally, and to the right or left. Equipped with a rubberised knob to provide enhanced grip. Available only for Mifare 13.56 MHz.


Flexlock Card+ is a flexible locking system that allows locks to be locked and unlocked via our Card+ app alongside the standard card and key tag options. A convenient and user-friendly way to lock and unlock temporary storage solutions via your mobile phone. Open the Card+ app and then scan the QR code on the locker to gain access. The app is available for both iOS and Android. Immediately after download the app is ready for use and the user does not have to create an account or register.


The lock can be easily reprogrammed to add or remove users – or to change the lock function e.g. time-imited. Administration is carried out manually at each the lock and are programmed using programming cards.



- Offers access to locks via card, key tag or mobile phone
- Easy to handle and administer
- Easy to install, easy to use
- · Robust and durable
- Battery powered
- Can be programmed with various functions e.g. time limit


Technical Specifications

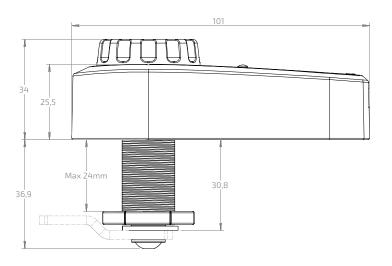

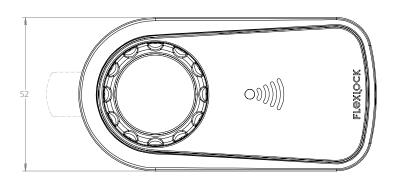

Size	101x52x25,5 mm without turn knob (34 mm with)
Max thickness door	24 mm
Hole pattern	Ø22x18 mm, Ø19x16 mm
Lock tumblers	See standard lock tumblers. Customizations are possible.
Weight	225 g (including battery)
Temperature, surrounding	+17° till +30° C
Humidity	20% to 75% relative humidity, non-condensing
IP-code	IP 52
Number of users	Max 200 st
Battery	For battery life and software to work according to specification requires a Flexlock battery which is provided by Swedstyle or your Flexlock dealer
Battery lifespan	2 to 3 years
RFID std	13,56 MHz, ISO/IEC 14443 A &B, ISO/IEC 180092, ISO/IEC 15693
Compatible with	13,56 MHz: Mifare Classic 1k, Mifare Classic 4k, Mifare DESFire EV1, EV2 & EV3, ISO 14443A, Legic Advant 15693, Mifare Plus, Mini, Ultra Light HID iClass 2k, iClass 4k, iClass SE 2k, 32k
Reading distance	0-15 mm with card, <5 mm with key tag
Lock standard	SS-EN 16014:2011, Designed for DIN 4547 Class B
Electrical safety	IEC/EN/UL 62368, CSA 22.2
EMC and EMR radio test	ETSI 300 330-1/-2 och 301 489-1/-3, FCC Part 15B, ICES-003
Bluetooth low energy	The Card+ mobile app requires support for BLE minimum 5.0
Mobile phone requirements	iPhone 8, Android 8.0 or later version

Flexlock is CE marked and meets the requirements, see separate CE declaration.

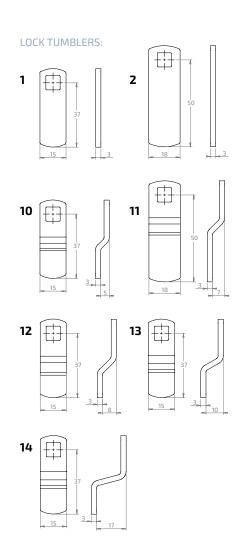

More info at www.flexlock.se

Flexlock is a product developed and marketed by Swedstyle.



Swedstyle AB Box 171 SE-567 24 Vaggeryd, Sweden info@swedstyle.se +46 393-363 60 www.swedstyle.com