

Flexlock Visible 2.0 Smart

Mifare 13.56 MHz




Flexlock Visible is a robust rotary lock that allows you to replace key locks on existing storage units and lockers with a secure, digital locking system. It is particularly well-suited to metal units, but works equally well with wooden cabinets. The lock is installed on the outside of the storage unit. This lock is programmed with our Smart system. With Smart you can use your mobile phone, card or tag as key. Central, cloud-based administration via computer. Available only for Mifare 13.56 MHz.

A lock for easier storage. Flexlock Visible is fitted externally and can be installed on units made from both wood and metal. It is compatible with the majority of storage units and lockers that are currently equipped with cylinder locks with 19 mm and 22 mm diameters. The lock is battery powered and no external power supply is required. The LED on the lock flashes green if the unit is free.

Lock tumblers are available in different lengths and designs to suit a range of units. The lock can be fitted to doors with a maximum thickness of 24 mm – either vertically or horizontally, and to the right or left. Equipped with a rubberised knob to provide enhanced grip. Available only for Mifare 13.56 MHz.


Flexlock Smart is a flexible locking system that allows locks to be locked and unlocked via our Connect Smart app alongside the standard card and key tag options. The app is available for both iOS and Android. The lock can be easily reprogrammed to add or remove users – or to change the lock function e.g. time-limited. Central, cloud-based administration via computer that enables management of many locks in several different locations. Smart also provides history with information about users and user time. The battery status is also displayed, making it easy to see when it is time to change the battery.

Flexlock Smart is sold as "software as a service" (SAAS) and signed with a contract. The contract also includes a Service Level Agreement (SLA) and a Data Processing Agreement (DPA).

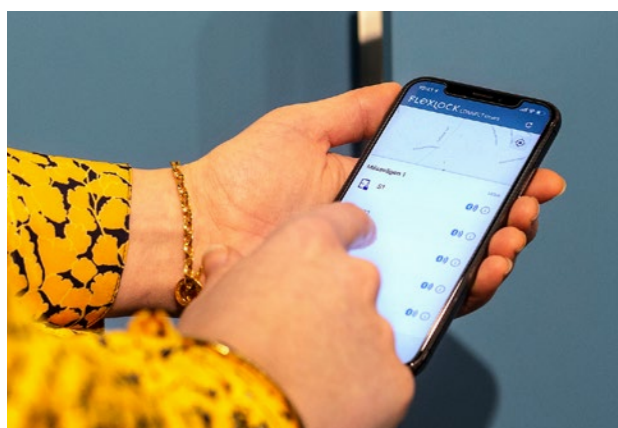


- Offers access to locks via card, key tag or mobile phone
- Central, cloud-based administration
- Easy to install, easy to use
- Robust and durable
- Battery powered
- Can be programmed with various functions e.g. time limit

Technical Specifications

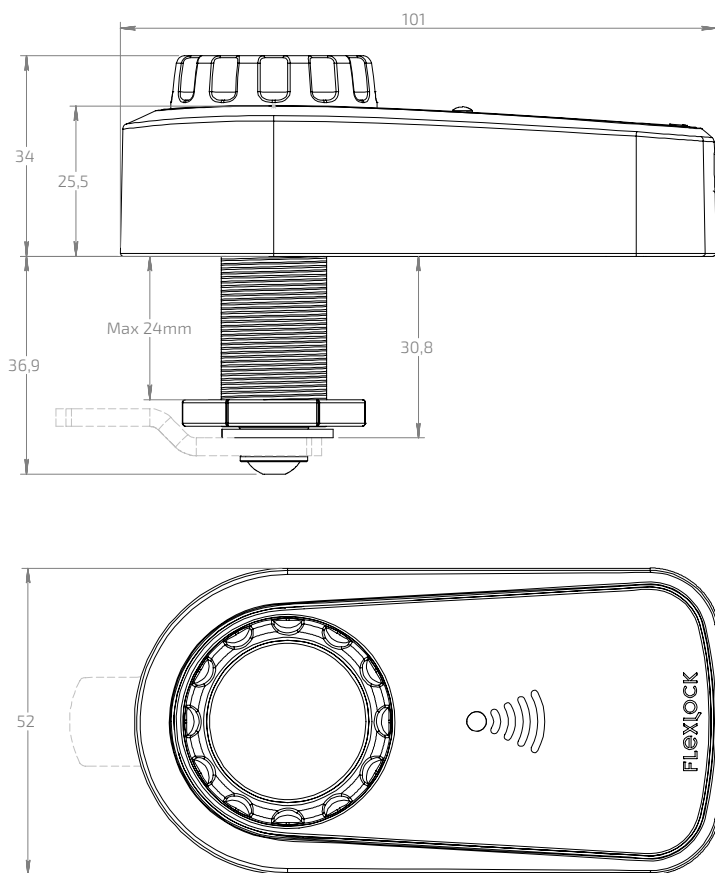

LOCK TUMBLERS:

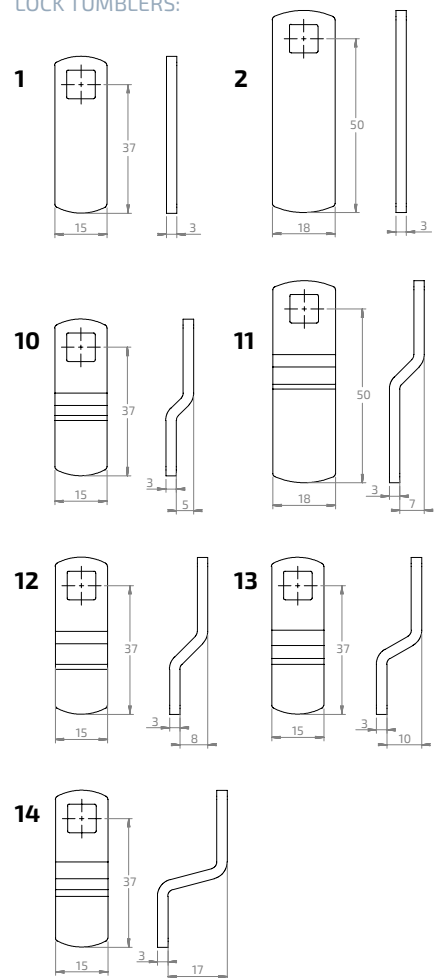

Size	101x52x25,5 mm without turn knob (34 mm with)
Max thickness door	24 mm
Hole pattern	Ø22x18 mm, Ø19x16 mm
Lock tumblers	See standard lock tumblers. Customizations are possible.
Weight	225 g (including battery)
Temperature, surrounding	+17° till +30° C
Humidity	20% to 75% relative humidity, non-condensing
IP-code	IP 52
Number of users	Max 200 st
Battery	For battery life and software to work according to specification requires a Flexlock battery which is provided by Swedstyle or your Flexlock dealer
Battery lifespan	2 to 3 years
RFID std	13,56 MHz, ISO/IEC 14443 A & B, ISO/IEC 180092, ISO/IEC 15693
Compatible with	13,56 MHz: Mifare Classic 1k, Mifare Classic 4k, Mifare DESFire EV1, EV2 & EV3, ISO 14443A, Legic Advant 15693, Mifare Plus, Mini, Ultra Light HID iClass 2k, iClass 4k, iClass SE 2k, 32k
Reading distance	0-15 mm with card, <5 mm with key tag
Lock standard	SS-EN 16014:2011, Designed for DIN 4547 Class B
Electrical safety	IEC/EN/UL 62368, CSA 22.2
EMC and EMR radio test	ETSI 300 330-1/-2 och 301 489-1/-3, FCC Part 15B, ICES-003
Contract	Flexlock Smart is sold as (SAAS) and signed with a contract. The contract also includes (SLA) and (DPA)

Flexlock is CE marked and meets the requirements, see separate CE declaration.

More info at www.flexlock.se

Flexlock is a product developed and marketed by Swedstyle.

 SWEDSTYLE

Swedstyle AB
Box 171
SE-567 24 Vaggeryd, Sweden
info@swedstyle.se
+46 393-363 60
www.swedstyle.com