



## CLASSIC TWIN 2.0 FLEX- 2022


New generation CLASSIC TWIN desk frame. Sit & Stand frame with electric motors for two work stations with straight desktops placed centrally next to each other. Stable design with continuous height adjustment control for ergonomic working positions.

- Ergonomic with flexible height
- For two work stations

CLASSIC Twin straight electric Sit & Stand frame, with continuous height adjustment control, makes it easy for the user to create an ergonomic work environment.

Robust and flexible design that can be adjusted lengthways ensures a reliable desk that is easily adapted to the desktop of your choice. Free-standing legs mean optimum freedom of movement thanks to unrestricted leg room. Based on the latest technology in height adjustment control to ensure reliable and comfortable operation.

Art. no	Colour	Stand sections
C4X113111A14X	Silver	3D
C4X113111A40X	Black	3D
C4X113111A25X	White	3D

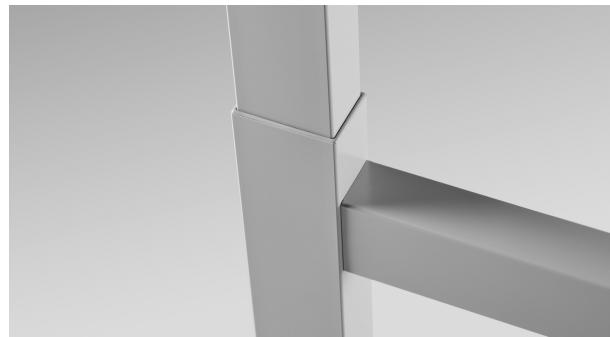

# Technical specifications

## CLASSIC TWIN 2.0 FLEX- 2022



Specification	Value
Adjustable height	Yes
Powered by	Electricity
Frame width	1150 - 1740 mm
Stroke	660 mm (590 - 1250 mm ± 5 mm)
Lift capacity	Max 100 kg x2
Speed	40 mm/sec
Standby power	0,1 W
Noise level	< 42 dBA
Dimensions tabletops	1160 - 2200 mm x 600 - 900 mm
Certifications	Fulfill Machine directive 2006/42/EC EMC directive 2014/30/EU Low voltage directive 2014/35/EC REACH, WEEE and RoHS 3 2015/863 EN 527-1:2011 Type A, EN 527-2:2016 ISO 21016 UL 962 ETL listed
Duty cycle	10%, 1 min/9 min pause. Max 2 min/18 min
Installation height down position	615 mm
Max bending torque column	Max 200 Nm
Paintwork	Powder coating
Area of use	Indoor environment
Control unit performance	Low inbuilt height dimensions Switching technology without any magnetic fields Inbuilt overload protection Inbuilt temperature protection
Lifetime	Min 10 000 cycles
Ambient temperature	Ambient temperature: +5° to +30° C
Humidity non condensed	Humidity: 5 - 85% non condensed